

# Drymec

## MAGY UL magnetically operated zero loss filter drain

The MAGY UL removes condensate from compressed air systems. The operation is automatic and there is no loss of valuable compressed air during condensate discharge.

The MAGY UL uses magnetic forces to operate the direct acting valve assembly and does not require an electrical supply. The magnets have been specially selected to ensure long and effective life.


### Key features :

#### Compact

- Supplied with vent adaptor union to prevent air locking
- Zero air loss during condensate discharge
- No electricity required to operate the drain
- Robust corrosion resistant aluminium casing

### Technical data

Drainage capacity	200 l/h	
Inlet	½"	
Outlet	⅛"	
Min operating pressure	0 bar	
Max operating pressure	16 bar	
Min operating temp	2° C	
Max operating temp	50° C	
Valve orifice	2 mm	
Valve seals	FPM	
Valve	Direct acting stainless steel	
Housing material	Corrosion resisting aluminium EP coating	
Dimensions	Width	120 mm
	Height	106 mm
	Length	120 mm
Weight kg	0.95	

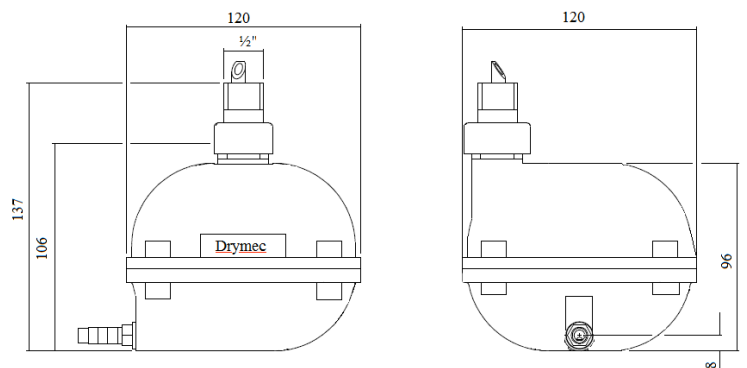

DRYMEC Ltd.

Unit 4R Bramhall Moor Technology Park  
Pepper Road  
Hazel Grove  
Stockport SK7 5BW

Tel 0161 487 4747  
Fax 0161 487 3778  
[www.drymec.com](http://www.drymec.com)  
[sales@drymec.com](mailto:sales@drymec.com)